


MST MIDI TO CV EXPANDER

QUICK START GUIDE

Connect IC2 cable to main MIDI to CV Module (or expander)

Connect IC2 cable to additional MIDI to CV Expanders

MIDI Channel Select: add up all pressed down numbers +1 for channel
All switches up = Channel 1

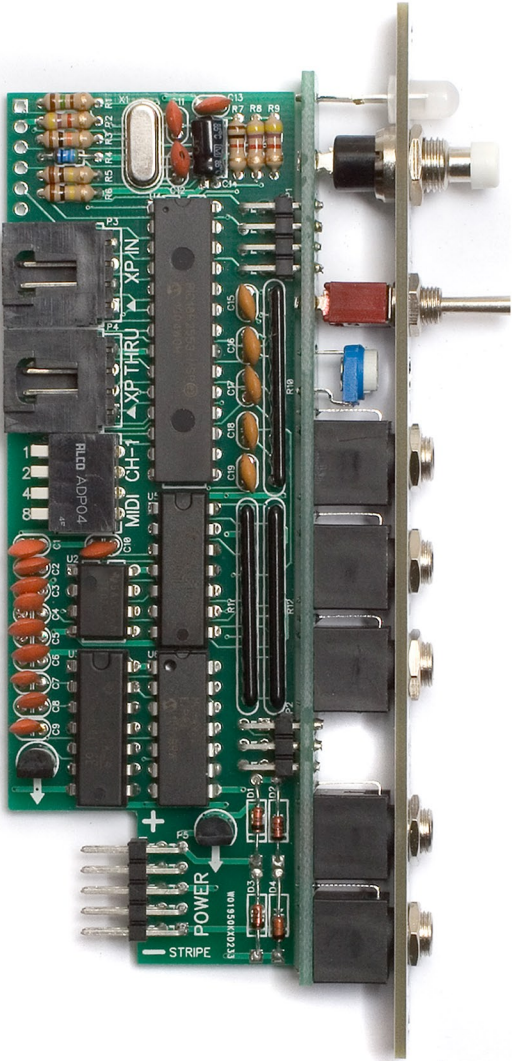

MODE LED INDICATOR
BLUE: Arpeggiator
RED: High Note Priority
GREEN: Low Note Priority
YELLOW: Last Note Priority

MODE BUTTON
Short Press
 -Turns on/off ARP
Long Press
 - Note priority select

ARPEGGIO SELECT SWITCH:
 Forward, Ping Pong or Random

VOLTS PER OCTAVE TRIMMER

VELOCITY CV OUTPUT

MOD WHEEL CV OUTPUT

AFTERTOUCH CV OUTPUT

MIDI EXP

CV OUTPUT

GATE OUTPUT

To activate/deactivate "order played" mode, hold the button down and flip the switch to any new position within 2 seconds. The LED will light green when "order played" mode is activated or red when deactivated.

Note: The arpeggiator requires that the module be receiving a clock via either the main module's CLK IN jack, USB port or MIDI IN jack. If the arp doesn't seem to be working when notes are being played or the blue light doesn't flash, check to make sure that it has a clock signal to work with.



classic noise.